

LORUS

INSTRUCTIONS

L-HL025-1

Thank you for your purchase of this delicate Projector clock. The utmost care has gone into the design and manufacture of your clock. Please read the instructions carefully and keep the manual well for future reference.

GETTING STARTED


1. Insert 2pcs AA batteries into the battery compartment, pay attention to the polarity.
2. When the clock is power on, all the segments of the LCD will be shown briefly.

FUNCTION KEYS

PROJECTOR ON/OFF key:	Press it to turn the projector and EL on/off.
MODE key:	Press it to switch between normal time mode and alarm time mode.
SET key:	Press and hold it for 2 seconds to enter the time setting mode. In setting mode, press it to step the setting items.
ADJUST key:	Press it to switch between Date/Month and Year display. In alarm time mode, press it to turn on/off the ALARM/SNOOZE function. In setting mode, press it to change the value of the flashing digit.
°C/°F key:	Press it to switch between °C and °F format.
RESET key:	In case of mal-function, use a pin to press the RESET key to restart the clock.

PRODUCT DESCRIPTIONS

1. PROJECTOR ON/OFF key
2. REVERSE key
3. LCD display
4. PROJECTOR
5. MODE key
6. SET key
7. ADJUST key
8. °C/°F key
9. RESET key
10. FOCUS key

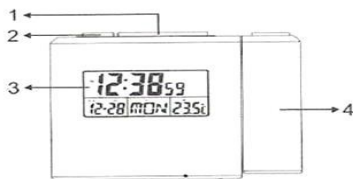


SETTING THE ALARM

1. In the Normal Time Display, press "MODE" key to enter the Alarm Time Mode.
2. Hold "SET" key for 2 seconds until HOUR digit flashing.
3. Press "ADJUST" key to increase the setting value.
4. Press "SET" key again to step the setting items. The sequence will be: Hour> Minute.
5. Press "MODE" key to exit the setting mode.



USING THE ALARM AND SNOOZE FUNCTION

1. Set the Alarm time as described in the previous section.

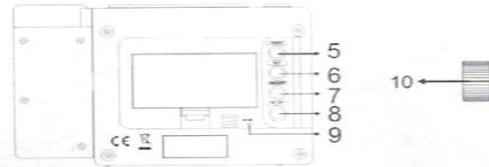

DISPLAY SYMBOLS

Normal Time Mode

1. Time
2. Month
3. Date
4. Day of the week
5. Temperature



Alarm Time Mode

1. Alarm time
2. Alarm mode
3. Alarm icon
4. Snooze icon



USING THE PROJECTOR

Press the PROJECTOR ON/OFF key to turn the projector on, rotate the projector to project the light beam to a dark background within 1~4 meters, the projected data (time & temperature) will be displayed on the dark background as following diagrams.



Note:

1. Press the PROJECTOR ON/OFF key once, EL back light and the projection last for 5 seconds.
2. Press the PROJECTOR ON/OFF key for 3 seconds, EL back light lasts for 5seconds and the projection keeps on for 30 minutes unless pressing PROJECTOR ON/OFF key again.
3. The rotated angle of the projector is $\pm 90^\circ$.
4. Press the "REVERSE" key to reverse the projected data.
5. Adjust the quality of the projected data by adjusting the FOCUS key.

MANUALLY SETTING THE TIME AND DATE

1. Press "SET" key for 2 seconds until HOUR digit flashing.
2. Press "ADJUST" key to increase the value of the flashing digit.
3. Press "SET" key again to step the setting items. The setting sequence will be: Hour > Minute > Second > 12/24Hr > Month > Date > Year.
4. Press "MODE" key to save and exit the setting mode, or let it exit automatically 30 seconds later without pressing any key.